


## FJ Cruiser Halo Plug and Play Harness

Step 1. Unscrew your blinker socket from your turn signal housing. Take your blinker bulb socket, gently press down the release tab and pull apart.



Step 2. Take your Plug and Play Harness and insert in between your separated lightbulb socket and your OEM socket.



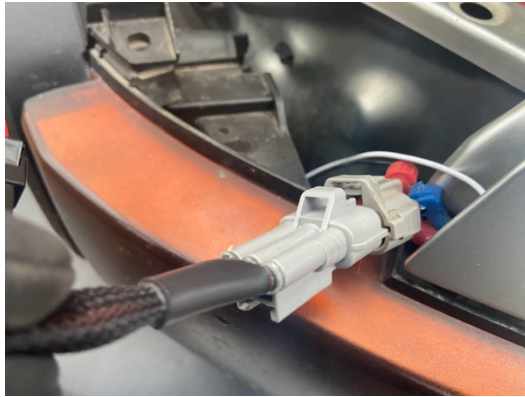

Step 2a.



Step 2b.

Step 3. Make sure plugs are firmly inserted and reinstall blinker socket as normal. Installation complete.



## FJ Cruiser Halo Plug and Play Harness (Continued)

### DRL Delete



We highly recommend you unplug your DRL module to extend the lifetime of your projectors and to have a better aesthetic look with your halos. The DRL Module keeps your headlights on at all times, even when not needed. Your DRL Module can be found underneath your driver side blinker housing. To disable, simply unplug the socket that is highlighted in the photo.

### Controlling your Halos/Headlights

Now that you've finished the DRL delete. The first setting on your light selector will turn on your halos and your marking lights without turning on the low beam. All other low/high beam settings will work normally by turning to the light indicator on your selector.

